




WiMi1000 Setup




November, 2019

WiMi1000 Repeater Bridge mode: Both WiMi TX & RX work as a Station

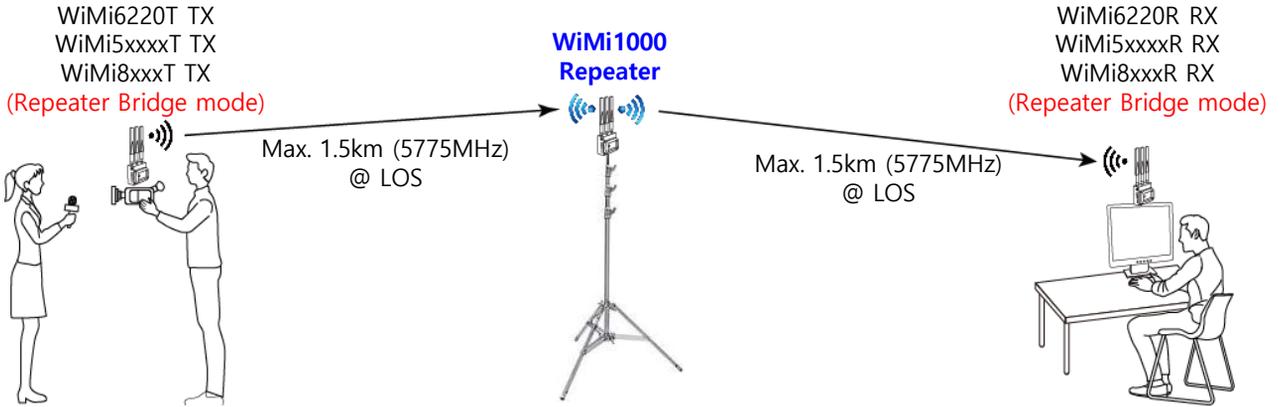

Wi-Fi Ch. Selection of the WiMi1000 Repeater AP

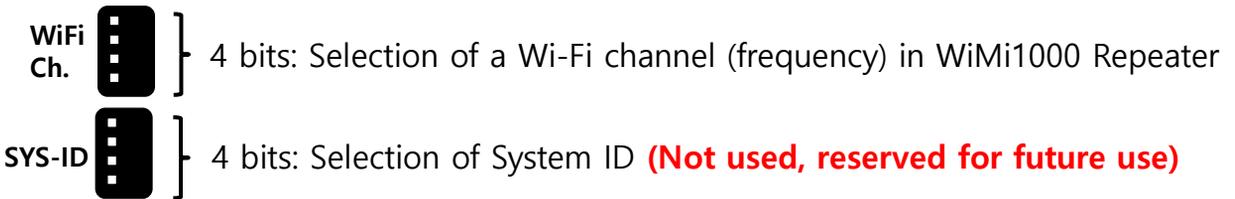


SSID: Bridge_00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15

- * The real operating Wi-Fi frequency will be determined by the WiMi1000's **WiFi Ch.** setting.
- * The **WiFi Ch.** DIP switch setting must be same with the **WiFi Ch.** setting of both transmitter and receiver.
- * The operation of multiple WiMi1000 at one place can be possible with the different **SSID** setting

FCC - SSID Number vs Ch./Frequency Table

SSID	Ch. No. (Freq. MHz)						
Bridge_00	42 (5210)**	Bridge_04	58 (5290)	Bridge_08	122 (5610)	Bridge_12	155 (5775)
Bridge_01	42 (5210)**	Bridge_05	106 (5530)	Bridge_09	138 (5690)	Bridge_13	155 (5775)
Bridge_02	42 (5210)**	Bridge_06	106 (5530)	Bridge_10	138 (5690)	Bridge_14	155 (5775)
Bridge_03	58 (5290)	Bridge_07	122 (5610)	Bridge_11	138 (5690)	Bridge_15	165 (5825)


** The Ch. 42(5210) **MUST NOT** be set when the **WiMi5150AT/R** are connected through the **WiMi1000**

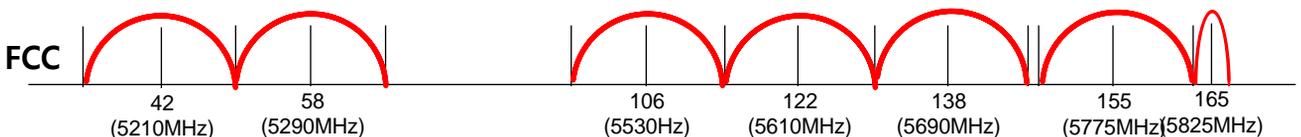

CE - SSID Number vs Ch./Frequency Table

SSID	Ch. No. (Freq. MHz)						
BridgeE_00	42 (5210)**	BridgeE_04	58 (5290)	BridgeE_08	106 (5530)	BridgeE_12	138 (5690)
BridgeE_01	42 (5210)**	BridgeE_05	58 (5290)	BridgeE_09	122 (5610)	BridgeE_13	138 (5690)
BridgeE_02	42 (5210)**	BridgeE_06	106 (5530)	BridgeE_10	122 (5610)	BridgeE_14	138 (5690)
BridgeE_03	58 (5290)	BridgeE_07	106 (5530)	BridgeE_11	122 (5610)	BridgeE_15	138 (5690)

** The Ch. 42(5210) MUST NOT be set when the WiMi5150AT/R are connected through the WiMi1000

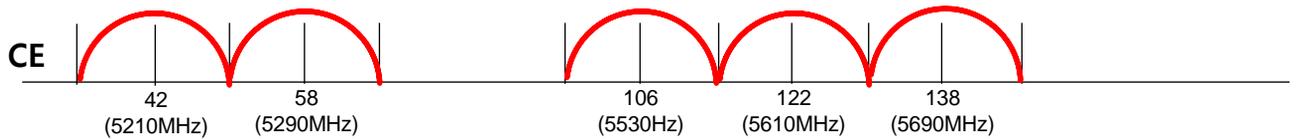

Japan - SSID Number vs Ch./Frequency Table

SSID	Ch. No. (Freq. MHz)						
BridgeJ_00	42 (5210)**	BridgeJ_04	58 (5290)	BridgeJ_08	106 (5530)	BridgeJ_12	122 (5610)
BridgeJ_01	42 (5210)**	BridgeJ_05	58 (5290)	BridgeJ_09	122 (5610)	BridgeJ_13	134 (5670)
BridgeJ_02	42 (5210)**	BridgeJ_06	106 (5530)	BridgeJ_10	122 (5610)	BridgeJ_14	134 (5670)
BridgeJ_03	58 (5290)	BridgeJ_07	106 (5530)	BridgeJ_11	122 (5610)	BridgeJ_15	134 (5670)

** The Ch. 42(5210) MUST NOT be set when the WiMi5150AT/R are connected through the WiMi1000

